



RECOMMENDED PCB LAYOUT

MATERIALS

1. Housing: PBT (UL94V-0)
2. Contact: Brass, Gold Plated On Contact Area
Sn Plated On Solderails
Nickel Under Plated Over All
3. Shell: Brass Or SPCC, Nickel Plated Or Sn Plated

SPECIFICATION:

1. Contact Current Rating: 1.8 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 500mΩ Min. at DC 250V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -20°C to 80°C

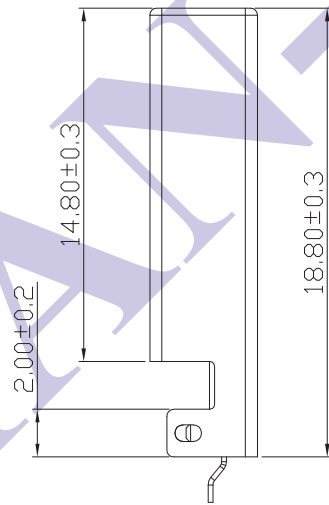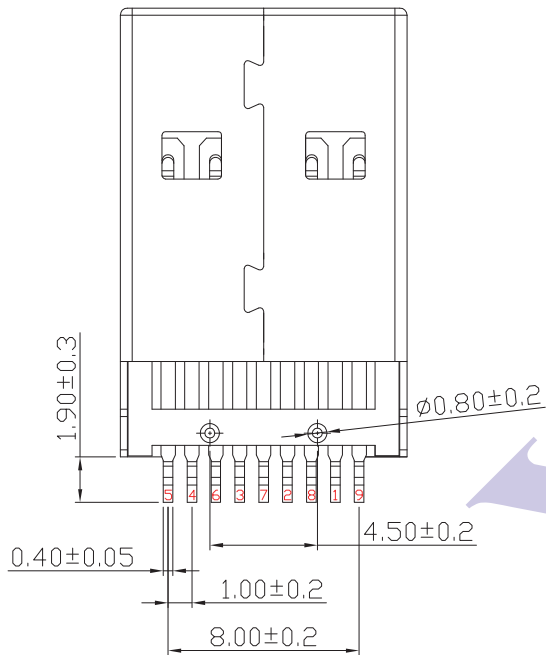

僅供參考

XIAN YI PRECISION CO., LTD. 祥益精密股份有限公司				TITLE / 品名: USB 3.0 ST 09 Pin Male A Type SMT				核準發行章	
PART NO / 料號: U-KB01-024				UNIT / 單位: mm		SHEET 1 OF 1		NO. REV / 版本: A.0 圖面發行	
APPROVE / 核準: Peter Huang	CHECKED / 審查: James	DRAWING / 繪圖: Chenrong	DRAWING NO / 圖號: KB01-024	GENERAL TOLERANCE: X ±0.50 .X ±0.38 .XX ±0.20 .XXX ±0.10		2011/07/07		日期	
8	7	6	5	4	3	2	1		