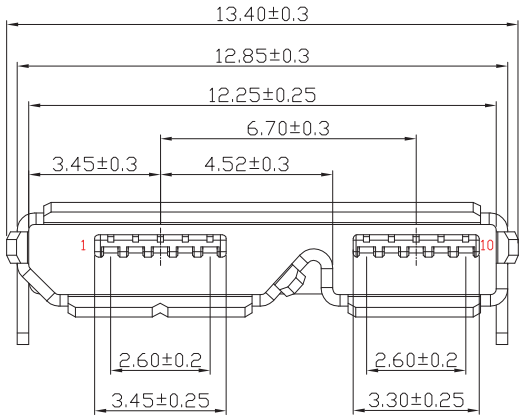

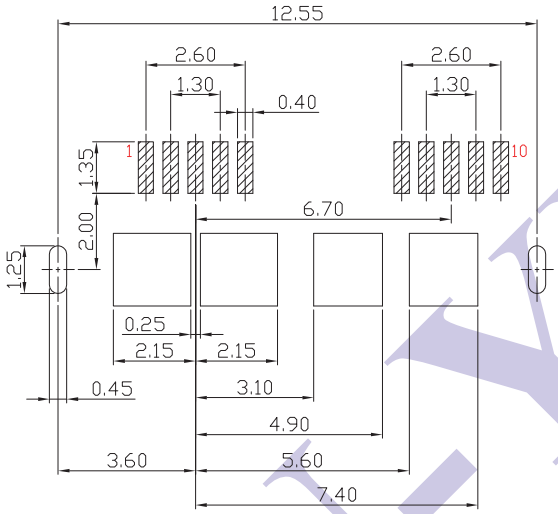

RECOMMENDED PCB LAYOUT

MATERIALS:
1. Housing: LCP (UL 94V-0),
2. Contact: Brass, Gold Plated on Contact Area
   Sn Plated on Soldertails
   Nickel Under Plated Over All
3. Shell: SPCC, Nickel Plated Or Sn Plated
   Or Gold Plated

SPECIFICATION:
1. Contact Current Rating: 0.5 Amp
2. Dielectric Withstanding Voltage: AC 30V r.m.s.
3. Insulation Resistance: 100mΩ Min. AC 100V
4. Contact Resistance: 30 Milliohm Max.
5. Operating Temperature: -25°C to 85°C

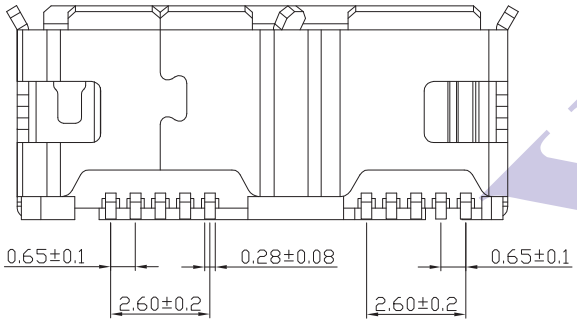



XIAN-YI

僅供參考

XIAN YI PRECISION CO., LTD. 祥益精密股份有限公司				TITLE /品名：Micro USB 3.0 Right Angle 10 Pin Female B Type Dip				核準發行章
				PART NO /料號：U-KB01-026				
APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位		GENERAL TOLERANCE X ±0.50 .X ±0.38 .XX ±0.20 .XXX ±0.10		
Peter Huang	*James*	*Chenrong*	KB01-026	mm	SHEET 1 OF 1			

NO.	REV /版本	修訂內容	日期
3			
2			
1			
	A.0	圖面發行	2011/07/07

H G F E D C B A

8 7 6 5 4 3 2 1