


MATERIALS:

1. Housing: LCP (UL 94V-0),
2. Contact: Brass, Gold Plated on Contact Area
Sn Plated on Solderails
Nickel Under Plated Over All
3. Shell: SPCC, Nickel Plated Or Sn Plated
Or Gold Plated

SPECIFICATION:

1. Contact Current Rating: 0.5 Amp
2. Dielectric Withstanding Voltage: AC 30V r.m.s.
3. Insulation Resistance: $100\text{m}\Omega$ Min. AC 100V
4. Contact Resistance: 30 Milliohm Max.
5. Operating Temperature: -25°C to 85°C

RECOMMENDED PCB LAYOUT

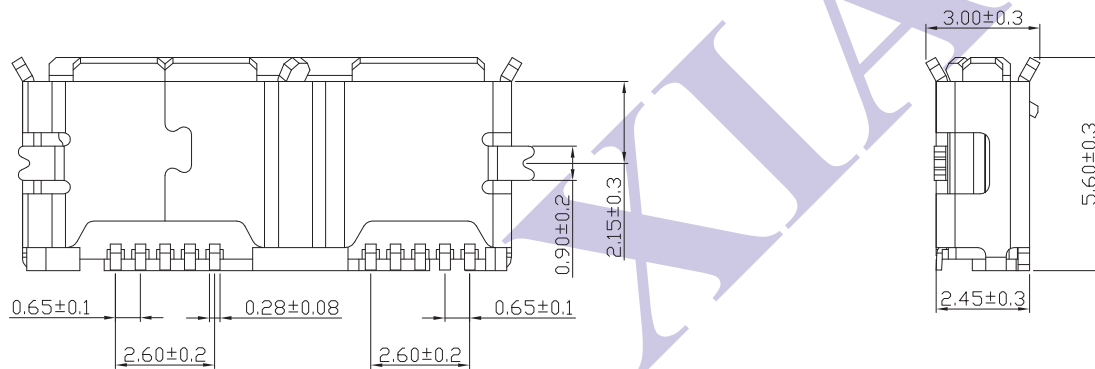

僅供參考

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: Micro USB 3.0 Right Angle 10 Pin Female B Type SMT

核準發行章

PART NO / 料號: U-KB01-027

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位		GENERAL TOLERANCE X ± 0.50 .X ± 0.38 .XX ± 0.20 .XXX ± 0.10				
<i>Peter Huang</i>	<i>James</i>	<i>Chenrong</i>	KB01-027	mm			A.0	圖面發行	2011/07/07	
8	7	6	5	4	3	2	1	NO.	REV / 版本	修訂內容
										日期