






P.C.B LAYOUT

MATERIAL AND FINISH:

1. Housing: LCP or PA46 (UL94V-0) White
2. Cover: LCP (UL94V-0) Black
3. Contact: Phosphor Bronze, Gold Flash Plated Over Nickel
4. Fiting Nial: Phosphor Bronze, Sn Plated Over Nickel



SECTION A-A

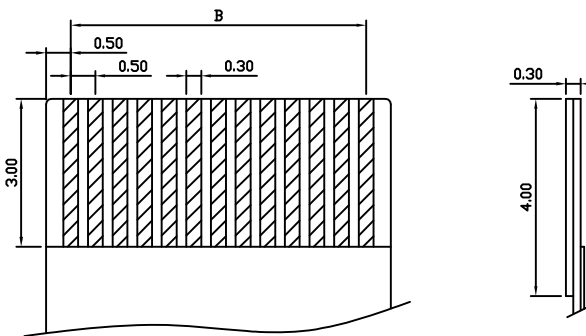

APPLICABLE FPC

PIN NO.	DIM=A	DIM=B	DIM=C	DIM=D
4P	3.77	1.50	2.60	3.27
5P	4.27	2.00	3.10	3.77
6P	4.77	2.50	3.60	4.27
7P	5.27	3.00	4.10	4.77
8P	5.77	3.50	4.60	5.27
9P	6.27	4.00	5.10	5.77
10P	6.77	4.50	5.60	6.27
11P	7.27	5.00	6.10	6.77
12P	7.77	5.50	6.60	7.27
13P	8.27	6.00	7.10	7.77
14P	8.77	6.50	7.60	8.27
15P	9.27	7.00	8.10	8.77
16P	9.77	7.50	8.60	9.27
17P	10.27	8.00	9.10	9.77
18P	10.77	8.50	9.60	10.27
19P	11.27	9.00	10.10	10.77
20P	11.77	9.50	10.60	11.27
21P	12.27	10.00	11.10	11.77
22P	12.77	10.50	11.60	12.27
23P	13.27	11.00	12.10	12.77
24P	13.77	11.50	12.60	13.27
25P	14.27	12.00	13.10	13.77
26P	14.77	12.50	13.60	14.27
27P	15.27	13.00	14.10	14.77
28P	15.77	13.50	14.60	15.27
29P	16.27	14.00	15.10	15.77
30P	16.77	14.50	15.60	16.27
31P	17.27	15.00	16.10	16.77
32P	17.77	15.50	16.60	17.27
33P	18.27	16.00	17.10	17.77
34P	18.77	16.50	17.60	18.27
35P	19.27	17.00	18.10	18.77
36P	19.77	17.50	18.60	19.27
37P	20.27	18.00	19.10	19.77
38P	20.77	18.50	19.60	20.27
39P	21.27	19.00	20.10	20.77
40P	21.77	19.50	20.60	21.27
41P	22.27	20.00	21.10	21.77
42P	22.77	20.50	21.60	22.27
43P	23.27	21.00	22.10	22.77
44P	23.77	21.50	22.60	23.27
45P	24.27	22.00	23.10	23.77
46P	24.77	22.50	23.60	24.27
47P	25.27	23.00	24.10	24.77
48P	25.77	23.50	24.60	25.27
49P	26.27	24.00	25.10	25.77
50P	26.77	24.50	25.60	26.27

僅供參考

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: 0.5mm FPC XXP SMT Connector E/O (H=1.0) RoHS

核準發行章

PART NO / 料號: F3AXX-XXP-XXXX

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
James	James	Chenrong	

UNIT / 單位	⊕	⊖
mm		
SHEET 1 OF 1		

GENERAL TOLERANCE
X ±0.50
.X ±0.38
.XX ±0.20
.XXX ±0.10

NO.	REV / 版本	圖面僅供參考, 實際尺寸以承認圖為主	2011/03/02
		修訂內容	日期